




OMS
SMOKE EXTRACTION MOTOR SERIES

www.omemotors.com



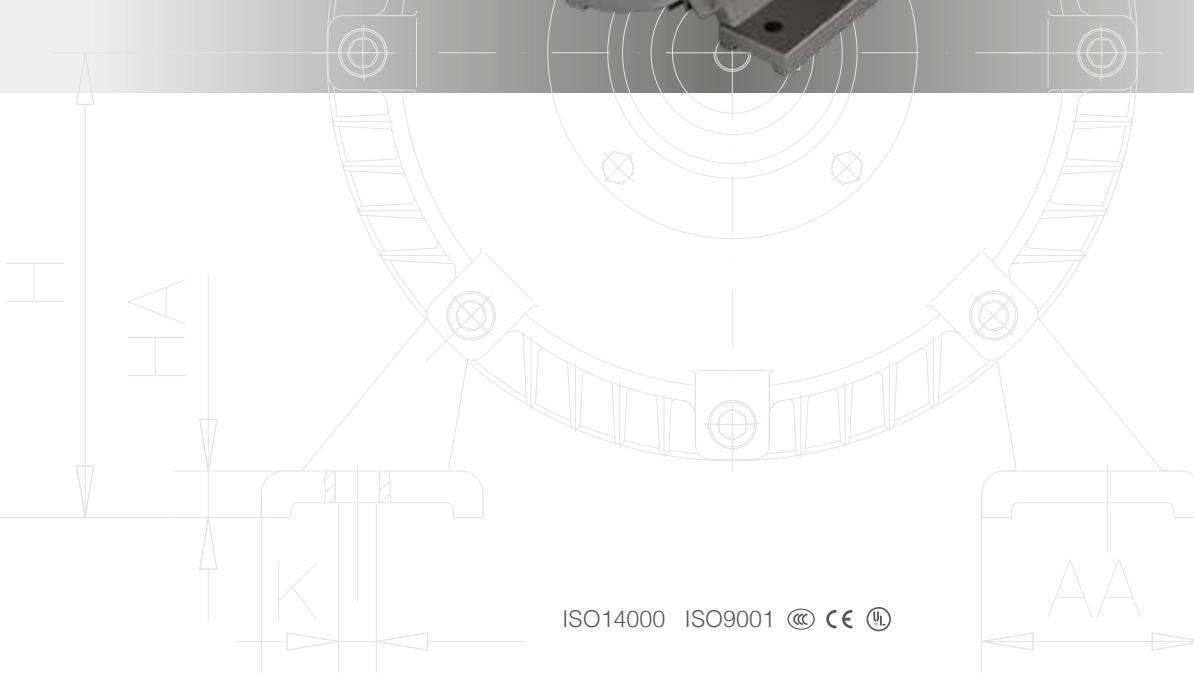

www.omemotors.com

GENERAL INFORMATION

OME Electric Motors Information

| | |
|-------------------------|----|
| OMS Series Introduction | 01 |
| Technical Data | 03 |
| Overall Dimension | 08 |





OMS
SMOKE EXTRACTION MOTOR SERIES

www.omemotors.com





OMS SMOKE EXTRACTION MOTOR SERIES



Reliable • Efficient • Fire Proof

- Standard low voltage motors - or IEC motors - designed and manufactured by OME are low voltage motors that offer high efficiency and at the same time effective energy savings, in line with environmental regulations.
- OME high efficiency motors ensure significant optimisation of energy consumption, safeguarding the environment and ensuring substantial savings in operating costs.



OME Electric Motors

OME IEC low voltage motors are suitable for all industrial sectors and applications, complying with national and international mandatory efficiency rules.


OME's motors help our customers increase their productivity, save energy, improve quality and generate power.

- High quality components including superior copper, metal cable glands and SKF bearings.

Thanks to their high quality, OME electric motors are perfectly suitable for heavy duty applications, with Long lasting performances.




High quality production

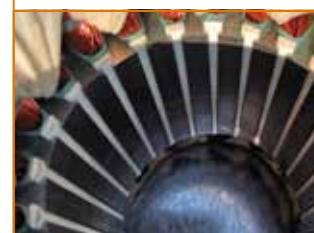

- OME also pays exceptional care and to the design attention of its electric motors.


This increase the cooling efficiency and also the looking of the product.

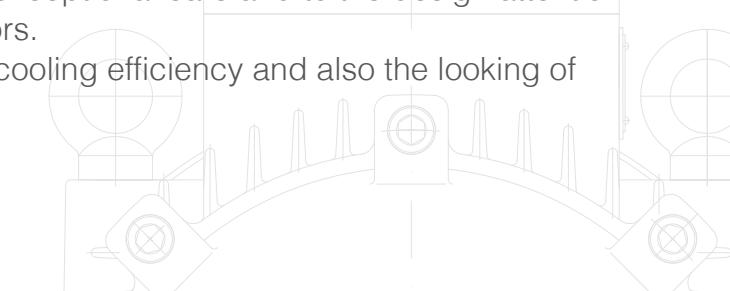

Modern design



- Customized packaging that provides increased protection during transport and an easier handling.

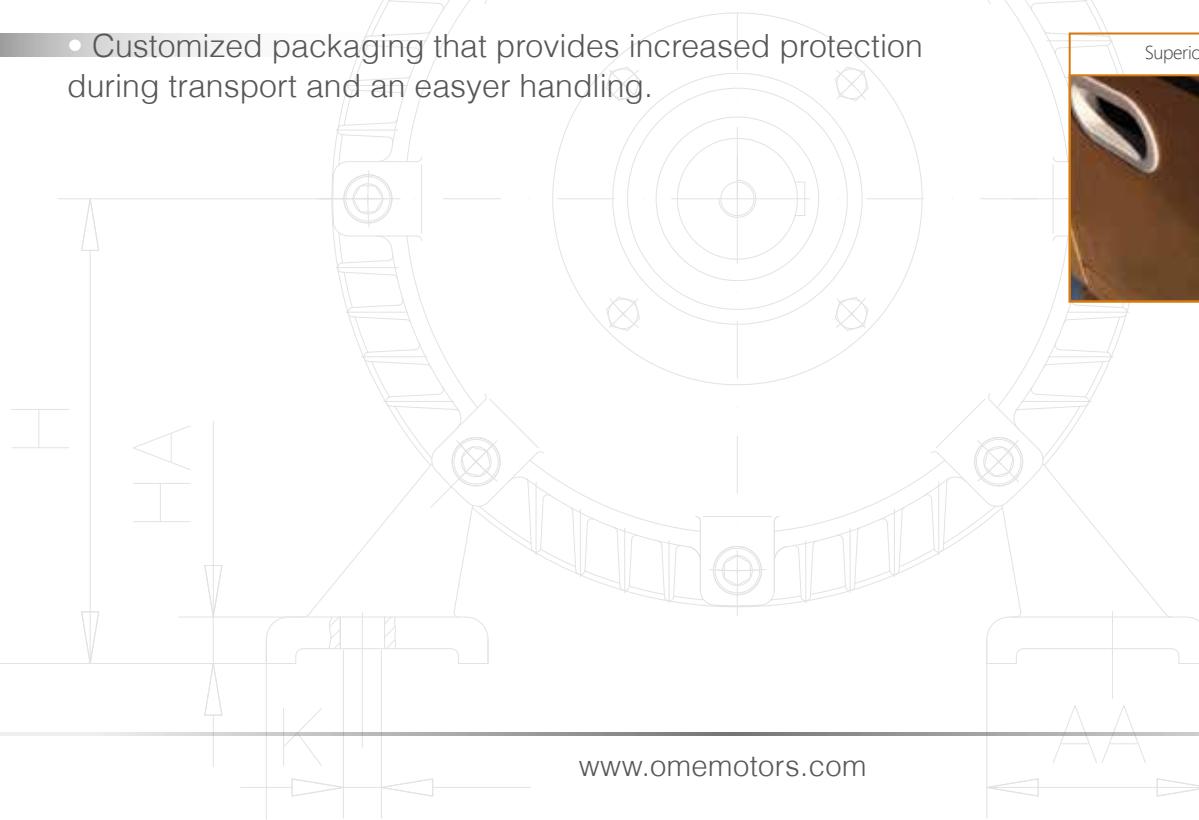

Superior packaging





OME Electric Motors and Orsatti Group

OME is a well-established global reality born from the Orsatti family's long experience in the electrical machinery sector and characterized by a history in continuous evolution.

The key points that distinguish the Orsatti Group are in particular:

- Technical experience of over 50 years
- The continuous research for new solutions to increase the performance of our electric motors
- Development of technical solutions in compliance with current standards
- The tailor-made service to customize the motors on customer request
- The wide range of production to meet any market need
- The constant research for suitable solutions to increase the efficiency of our electric motors
- Compliance with the standards required for energy saving and environmental protection

MISSION


Our mission is to be a leading company in the production of electric motors at an international level.

VISION

Our vision is to design and manufacture highly customized motors, meeting the most varied customer requirements, managing to make competitive even the smallest realities.

VALUES

- The high quality of production, sales, service and maintenance;
- Intelligent and low costs logistics;
- Providing motors, services and expertise to save energy and improve customer processes throughout the life cycle of our products and beyond.

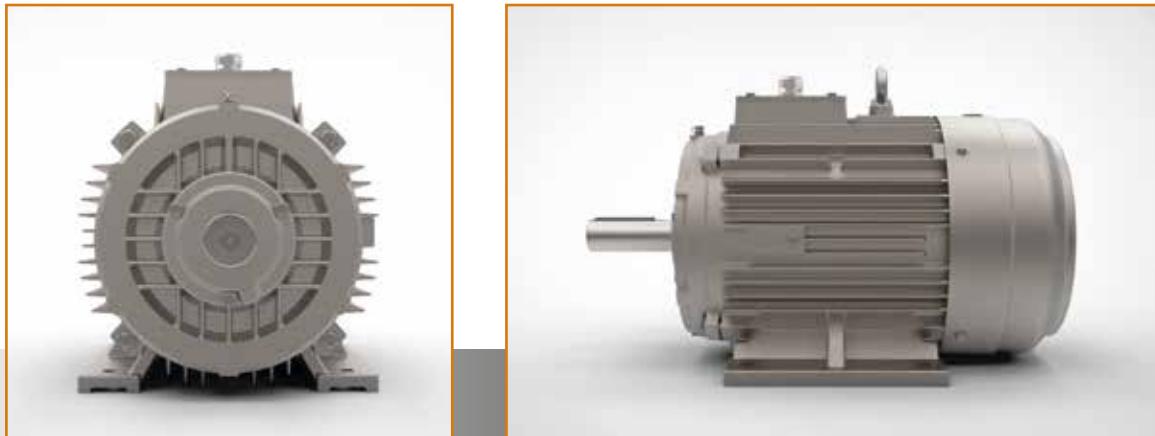

Series OMS

SMOKE EXTRACTION MOTOR SERIES

- Smoke extraction motors

- Motors for air intake and fume extraction in crowded environments.
- Reliable and safe devices in both normal and emergency situations, even at high temperatures.

Air Intake and Smoke Motors For Maximum Safety In Crowded Places.

The air and smoke intake motors are new products in the OME Motors range. These are three-phase electric motors designed and built specifically to be applied to fans and smoke extraction systems in industrial or commercial buildings with a large turnout of people. In all these cases the use of a fume extraction motor is able to guarantee the right ventilation and to increase the level of safety even in emergency situations.

The motor models for air intake and fume extraction are designed and developed by OME Motors to work in two different ways:

- Under normal conditions, they operate as air intake motors, guaranteeing the correct circulation of oxygen in closed environments.
- In emergency conditions they allow the rapid evacuation of smoke, delay fires and keep escape routes free, limiting subsequent damage; in these cases, moreover, the fume suction motors allow to protect any devices and equipment present, minimizing the thermal stress of the components.



• Characteristics and Functionality of Air Intake and Fume Extraction Motors.

The motors for air intake and fume extraction are designed for use in normal and emergency conditions. They, in particular:

- They work effectively with fans and smoke extraction systems.
- In normal conditions, they ensure proper air circulation in closed environments.
- They are designed to operate - in fire conditions - in complete autonomy, resisting two hours even at very high temperatures.
- They prevent or delay the spread of the fire, facilitating evacuation and rescue operations.

• Situations of Use and Application of Fume and Air Intake Motors.

The motor models for fumes and air extraction are designed to be used in air treatment plants and in combination with fans and blowers. Therefore, they can be successfully used in all places subject to crowding and passage of people, such as factories, warehouses, business centers, covered parking lots, road or underground tunnels, cinemas, airports, shopping centers, etc.). In particular, the devices made by OME Motors can be used as motors for industrial hoods, guaranteeing the correct ventilation of the systems, or as electric motors for tunnels, tunnels and underground roads, offering maximum safety to users even in the event of breakdowns or fires.



TECHNICAL DATA

- OMS Smoke Extractor Motor Series

| Model T | Rated Output | | Rated Current (A) | | | Speed rpm | Eff(%) | Power factor COSφ | Tst/Tn | Ist/In | Tmax/Tu |
|------------|--------------|---------|-------------------|---------|------|--------------|--------|-------------------------|--------|--------|---------|
| KW | HP | at 380V | at 400V | at 415V | | | | | | | |
| OMS631-2 | 0.18 | 0.25 | 0.54 | 0.52 | 0.50 | 2720 | 63.0 | 0.80 | 2.2 | 5.5 | 2.2 |
| OMS632-2 | 0.25 | 0.34 | 0.71 | 0.67 | 0.65 | 2720 | 66.0 | 0.81 | 2.2 | 5.5 | 2.2 |
| OMS633-2 | 0.37 | 0.5 | 1.04 | 0.98 | 0.95 | 2730 | 67.0 | 0.81 | 2.2 | 5.5 | 2.2 |
| OMS711-2 | 0.37 | 0.5 | 1.02 | 0.97 | 0.93 | 2740 | 68.0 | 0.81 | 2.2 | 6.1 | 2.2 |
| OMS712-2 | 0.55 | 0.75 | 1.44 | 1.36 | 1.31 | 2740 | 71.0 | 0.82 | 2.2 | 6.1 | 2.3 |
| OMS713-2 | 0.75 | 1 | 1.94 | 1.85 | 1.78 | 2750 | 71.5 | 0.82 | 2.2 | 6.1 | 2.3 |
| OMS801-2 | 0.75 | 1 | 1.83 | 1.74 | 1.68 | 2830 | 75.0 | 0.83 | 2.2 | 6.1 | 2.3 |
| OMS802-2 | 1.1 | 1.5 | 2.58 | 2.45 | 2.37 | 2830 | 77.0 | 0.84 | 2.2 | 7.0 | 2.3 |
| OMS803-2 | 1.5 | 2 | 3.48 | 3.30 | 3.19 | 2830 | 78.0 | 0.84 | 2.2 | 7.0 | 2.3 |
| OMS90S-2 | 1.5 | 2 | 3.43 | 3.26 | 3.14 | 2840 | 79.0 | 0.84 | 2.2 | 7.0 | 2.3 |
| OMS90L-2 | 2.2 | 3 | 4.85 | 4.61 | 4.45 | 2840 | 81.0 | 0.85 | 2.2 | 7.0 | 2.3 |
| OMS90L2-2 | 3 | 4 | 6.46 | 6.14 | 5.92 | 2850 | 82.0 | 0.86 | 2.2 | 7.0 | 2.3 |
| OMS100L-2 | 3 | 4 | 6.31 | 6.00 | 5.78 | 2870 | 83.0 | 0.87 | 2.2 | 7.5 | 2.3 |
| OMS100L2-2 | 4 | 5.5 | 8.32 | 7.90 | 7.61 | 2870 | 84.0 | 0.87 | 2.2 | 7.5 | 2.3 |
| OMS112M-2 | 4 | 5.5 | 8.13 | 7.72 | 7.44 | 2890 | 85.0 | 0.88 | 2.2 | 7.5 | 2.3 |
| OMS132S1-2 | 5.5 | 7.5 | 11.0 | 10.5 | 10.1 | 2900 | 86.0 | 0.88 | 2.2 | 7.5 | 2.3 |
| OMS132S2-2 | 7.5 | 10 | 14.9 | 14.1 | 13.6 | 2900 | 87.0 | 0.88 | 2.2 | 7.5 | 2.3 |
| OMS132M-2 | 9.2 | 12.5 | 18.2 | 17.2 | 16.6 | 2900 | 87.5 | 0.88 | 2.2 | 7.5 | 2.3 |
| OMS160M1-2 | 11 | 15 | 21.2 | 20.2 | 19.5 | 2930 | 88.4 | 0.89 | 2.2 | 7.5 | 2.3 |
| OMS160M2-2 | 15 | 20 | 28.6 | 27.2 | 26.2 | 2930 | 89.4 | 0.89 | 2.2 | 7.5 | 2.3 |
| OMS160L-2 | 18.5 | 25 | 34.7 | 33.0 | 31.8 | 2930 | 90.0 | 0.90 | 2.2 | 7.5 | 2.3 |
| OMS180M-2 | 22 | 30 | 41.0 | 39.0 | 37.6 | 2940 | 90.5 | 0.90 | 2.0 | 7.5 | 2.3 |
| OMS200L1-2 | 30 | 40 | 55.4 | 52.6 | 50.7 | 2950 | 91.4 | 0.90 | 2.0 | 7.5 | 2.3 |
| OMS200L2-2 | 37 | 50 | 67.9 | 64.5 | 62.2 | 2950 | 92.0 | 0.90 | 2.0 | 7.5 | 2.3 |
| OMS225M-2 | 45 | 60 | 82.1 | 78.0 | 75.2 | 2970 | 92.5 | 0.90 | 2.0 | 7.5 | 2.3 |
| OMS250M-2 | 55 | 75 | 100 | 94.8 | 91.4 | 2970 | 93.0 | 0.90 | 2.0 | 7.5 | 2.3 |
| OMS280S-2 | 75 | 100 | 135 | 129 | 124 | 2970 | 93.6 | 0.90 | 2.0 | 7.5 | 2.3 |
| OMS280M-2 | 90 | 125 | 160 | 152 | 146 | 2970 | 94.1 | 0.91 | 2.0 | 7.5 | 2.3 |
| OMS315S-2 | 110 | 150 | 195 | 185 | 178 | 2980 | 94.4 | 0.91 | 1.8 | 7.1 | 2.2 |
| OMS315M-2 | 132 | 180 | 233 | 222 | 214 | 2980 | 94.5 | 0.91 | 1.8 | 7.1 | 2.2 |
| OMS315L1-2 | 160 | 220 | 278 | 264 | 255 | 2980 | 95.0 | 0.92 | 1.8 | 7.1 | 2.2 |
| OMS315L2-2 | 200 | 270 | 348 | 330 | 318 | 2980 | 95.0 | 0.92 | 1.8 | 7.1 | 2.2 |
| OMS355M1-2 | 220 | 300 | 382 | 363 | 350 | 2985 | 95.0 | 0.92 | 1.6 | 7.1 | 2.2 |
| OMS355M2-2 | 250 | 335 | 435 | 413 | 398 | 2985 | 95.0 | 0.92 | 1.6 | 7.1 | 2.2 |
| OMS355L1-2 | 280 | 375 | 487 | 462 | 446 | 2985 | 95.0 | 0.92 | 1.6 | 7.1 | 2.2 |
| OMS355L2-2 | 315 | 425 | 548 | 520 | 501 | 2985 | 95.0 | 0.92 | 1.6 | 7.1 | 2.2 |
| OMS400M1-2 | 355 | 475 | 631 | 599 | 578 | 2980 | 95.0 | 0.90 | 1.3 | 6.5 | 2.4 |
| OMS400M2-2 | 400 | 535 | 711 | 675 | 651 | 2980 | 95.0 | 0.90 | 1.4 | 6.5 | 2.2 |
| OMS400M3-2 | 450 | 600 | 800 | 760 | 732 | 2980 | 95.0 | 0.90 | 1.3 | 6.5 | 2.2 |
| OMS400L1-2 | 500 | 670 | 879 | 835 | 805 | 2985 | 95.0 | 0.91 | 1.2 | 7.0 | 2.1 |
| OMS400L2-2 | 560 | 750 | 984 | 935 | 901 | 2985 | 95.0 | 0.91 | 1.2 | 7.0 | 2.1 |

4P

Synchronous speed 1500r/min

| Model T | Rated Output | | Rated Current (A) | | | Speed rpm | Eff(%) | Power factor COSφ | Tst/Tn | Ist/In | Tmax/Tu |
|-------------|--------------|------|-------------------|---------|---------|--------------|--------|-------------------------|--------|--------|---------|
| | KW | HP | at 380V | at 400V | at 415V | | | | | | |
| OMS631-4 | 0.12 | 0.16 | 0.46 | 0.44 | 0.42 | 1310 | 55.0 | 0.72 | 2.3 | 5.2 | 2.2 |
| OMS632-4 | 0.18 | 0.25 | 0.65 | 0.61 | 0.59 | 1310 | 58.0 | 0.73 | 2.3 | 5.2 | 2.2 |
| OMS633-4 | 0.25 | 0.34 | 0.87 | 0.82 | 0.79 | 1320 | 60.0 | 0.73 | 2.3 | 5.2 | 2.2 |
| OMS711-4 | 0.25 | 0.34 | 0.81 | 0.77 | 0.75 | 1330 | 63.0 | 0.74 | 2.3 | 5.2 | 2.2 |
| OMS712-4 | 0.37 | 0.5 | 1.15 | 1.10 | 1.06 | 1330 | 65.0 | 0.75 | 2.3 | 5.2 | 2.2 |
| OMS713-4 | 0.55 | 0.75 | 1.66 | 1.58 | 1.52 | 1340 | 67.0 | 0.75 | 2.3 | 5.2 | 2.2 |
| OMS801-4 | 0.55 | 0.75 | 1.57 | 1.49 | 1.44 | 1390 | 71.0 | 0.75 | 2.3 | 5.2 | 2.3 |
| OMS802-4 | 0.75 | 1.0 | 2.02 | 1.91 | 1.85 | 1390 | 74.4 | 0.76 | 2.3 | 6.0 | 2.3 |
| OMS803-4 | 1.1 | 1.5 | 2.92 | 2.77 | 2.67 | 1395 | 75.3 | 0.76 | 2.3 | 6.0 | 2.3 |
| OMS90S-4 | 1.1 | 1.5 | 2.85 | 2.71 | 2.61 | 1400 | 76.2 | 0.77 | 2.3 | 6.0 | 2.3 |
| OMS90L-4 | 1.5 | 2 | 3.68 | 3.49 | 3.37 | 1400 | 78.5 | 0.79 | 2.3 | 6.0 | 2.3 |
| OMS90L2-4 | 2.2 | 3 | 5.34 | 5.08 | 4.89 | 1415 | 79.2 | 0.79 | 2.3 | 6.0 | 2.3 |
| OMS100L1-4 | 2.2 | 3 | 5.09 | 4.84 | 4.67 | 1430 | 81.0 | 0.81 | 2.3 | 7.0 | 2.3 |
| OMS10012-4 | 3 | 4 | 6.73 | 6.39 | 6.16 | 1430 | 82.6 | 0.82 | 2.3 | 7.0 | 2.3 |
| OMS10013-4 | 4 | 5.5 | 8.94 | 8.49 | 8.19 | 1430 | 82.9 | 0.82 | 2.3 | 7.0 | 2.3 |
| OMS112M-4 | 4 | 5.5 | 8.80 | 8.36 | 8.06 | 1440 | 84.2 | 0.82 | 2.3 | 7.0 | 2.3 |
| OMS112112-4 | 5.5 | 7.5 | 12.0 | 11.4 | 11.0 | 1440 | 84.8 | 0.82 | 2.3 | 7.0 | 2.3 |
| OMS132S-4 | 5.5 | 7.5 | 11.7 | 11.2 | 10.8 | 1440 | 85.7 | 0.83 | 2.3 | 7.0 | 2.3 |
| OMS132M-4 | 7.5 | 10 | 15.6 | 14.8 | 14.3 | 1440 | 87.0 | 0.84 | 2.3 | 7.0 | 2.3 |
| OMS132112-4 | 9.2 | 12.5 | 19.0 | 18.0 | 17.4 | 1440 | 87.7 | 0.84 | 2.3 | 7.0 | 2.3 |
| OMS160M-4 | 11 | 15 | 22.2 | 21.1 | 20.4 | 1460 | 88.4 | 0.85 | 2.2 | 7.0 | 2.3 |
| OMS160L-4 | 15 | 20 | 30.0 | 28.5 | 27.5 | 1460 | 89.4 | 0.85 | 2.2 | 7.5 | 2.3 |
| OMS180M-4 | 18.5 | 25 | 36.3 | 34.5 | 33.3 | 1470 | 90.0 | 0.86 | 2.2 | 7.5 | 2.3 |
| OMS180L-4 | 22 | 30 | 42.9 | 40.8 | 39.3 | 1470 | 90.5 | 0.86 | 2.2 | 7.5 | 2.3 |
| OMS200L-4 | 30 | 40 | 58.0 | 55.1 | 53.1 | 1470 | 91.4 | 0.86 | 2.2 | 7.2 | 2.3 |
| OMS225S-4 | 37 | 50 | 70.2 | 66.7 | 64.3 | 1480 | 92.0 | 0.87 | 2.2 | 7.2 | 2.3 |
| OMS225M-4 | 45 | 60 | 85.0 | 80.7 | 77.8 | 1480 | 92.5 | 0.87 | 2.2 | 7.2 | 2.3 |
| OMS250M-4 | 55 | 75 | 103 | 98.1 | 94.6 | 1480 | 93.0 | 0.87 | 2.2 | 7.2 | 2.3 |
| OMS280S-4 | 75 | 100 | 140 | 133 | 128 | 1480 | 93.6 | 0.87 | 2.2 | 7.2 | 2.3 |
| OMS280M-4 | 90 | 125 | 167 | 159 | 153 | 1490 | 93.9 | 0.87 | 2.2 | 7.2 | 2.3 |
| OMS315S-4 | 110 | 150 | 201 | 191 | 184 | 1490 | 94.4 | 0.88 | 2.1 | 6.9 | 2.2 |
| OMS315M-4 | 132 | 180 | 241 | 229 | 220 | 1490 | 94.7 | 0.88 | 2.1 | 6.9 | 2.2 |
| OMS315LI-4 | 160 | 220 | 288 | 273 | 263 | 1490 | 95.0 | 0.89 | 2.1 | 6.9 | 2.2 |
| OMS315L2-4 | 200 | 270 | 359 | 341 | 329 | 1490 | 95.0 | 0.89 | 2.1 | 6.9 | 2.2 |
| OMS355111-4 | 220 | 300 | 391 | 371 | 358 | 1490 | 95.0 | 0.90 | 2.1 | 6.9 | 2.2 |
| OMS355112-4 | 250 | 335 | 444 | 422 | 407 | 1490 | 95.0 | 0.90 | 2.1 | 6.9 | 2.2 |
| OMS355L1-4 | 280 | 375 | 498 | 473 | 456 | 1490 | 95.0 | 0.90 | 2.1 | 6.9 | 2.2 |
| OMS355L2-4 | 315 | 425 | 560 | 532 | 513 | 1490 | 95.0 | 0.90 | 2.1 | 6.9 | 2.2 |
| OMS400M1-4 | 355 | 475 | 631 | 600 | 578 | 1490 | 96.0 | 0.89 | 1.5 | 6.5 | 2.9 |
| OMS400M2-4 | 400 | 535 | 711 | 676 | 651 | 1491 | 96.0 | 0.89 | 1.5 | 6.5 | 2.8 |
| OMS400113-4 | 450 | 600 | 791 | 752 | 725 | 1489 | 96.0 | 0.90 | 1.5 | 6.5 | 2.8 |
| OMS400L1-4 | 500 | 670 | 879 | 835 | 805 | 1492 | 96.0 | 0.90 | 1.5 | 6.5 | 2.8 |
| OMS400L2-4 | 560 | 750 | 985 | 936 | 902 | 1492 | 96.0 | 0.90 | 1.5 | 6.5 | 2.8 |
| OMS400L3-4 | 630 | 840 | 1108 | 1052 | 1014 | 1487 | 96.0 | 0.90 | 1.5 | 6.5 | 2.8 |

6P

Synchronous speed 1000r/min

| Model T | Rated Output | | Rated Current (A) | | | Speed rpm | Eff(%) | Power factor COSφ | Tst/Tn | Ist/In | Tmax/Tu |
|------------|--------------|------|-------------------|---------|---------|--------------|--------|-------------------------|--------|--------|---------|
| | KW | HP | at 380V | at 400V | at 415V | | | | | | |
| OMS711-6 | 0.18 | 0.25 | 0.77 | 0.73 | 0.70 | 850 | 54.0 | 0.66 | 1.9 | 4.0 | 4.0 |
| OMS712-6 | 0.25 | 0.34 | 0.98 | 0.93 | 0.90 | 850 | 57.0 | 0.68 | 1.9 | 4.0 | 4.0 |
| OMS713-6 | 0.37 | 0.50 | 1.43 | 1.35 | 1.31 | 850 | 58.0 | 0.68 | 1.9 | 4.0 | 4.0 |
| OMS801-6 | 0.37 | 0.50 | 1.34 | 1.27 | 1.23 | 890 | 60.0 | 0.70 | 1.9 | 4.7 | 4.7 |
| OMS802-6 | 0.55 | 0.75 | 1.84 | 1.75 | 1.69 | 890 | 63.0 | 0.72 | 1.9 | 4.7 | 4.7 |
| OMS803-6 | 0.75 | 1 | 2.40 | 2.28 | 2.20 | 890 | 66.0 | 0.72 | 1.9 | 4.7 | 4.7 |
| OMS90S-6 | 0.75 | 1 | 2.19 | 2.08 | 2.00 | 910 | 72.4 | 0.72 | 2.0 | 5.5 | 5.5 |
| OMS90L-6 | 1.1 | 1.5 | 3.00 | 2.85 | 2.75 | 910 | 76.2 | 0.73 | 2.0 | 5.5 | 5.5 |
| OMS90L2-6 | 1.5 | 2 | 4.02 | 3.81 | 3.68 | 910 | 76.7 | 0.74 | 2.0 | 5.5 | 5.5 |
| OMS100L-6 | 1.5 | 2 | 3.88 | 3.69 | 3.55 | 940 | 77.3 | 0.76 | 2.0 | 5.5 | 5.5 |
| OMS112M-6 | 2.2 | 3 | 5.53 | 5.25 | 5.06 | 940 | 79.6 | 0.76 | 2.0 | 6.5 | 6.5 |
| OMS112M2-6 | 3 | 4 | 7.40 | 7.03 | 6.78 | 940 | 81.0 | 0.76 | 2.0 | 6.5 | 6.5 |
| OMS132S-6 | 3 | 4 | 7.37 | 7.00 | 6.75 | 960 | 81.4 | 0.76 | 2.1 | 6.5 | 6.5 |
| OMS132M1-6 | 4 | 5.5 | 9.63 | 9.15 | 8.82 | 960 | 83.0 | 0.76 | 2.1 | 6.5 | 6.5 |
| OMS132M2-6 | 5.5 | 7.5 | 12.8 | 12.2 | 11.7 | 960 | 84.6 | 0.77 | 2.1 | 6.5 | 6.5 |
| OMS160M-6 | 7.5 | 10 | 17.0 | 16.1 | 15.6 | 970 | 86.0 | 0.78 | 2.1 | 6.5 | 6.5 |
| OMS160L-6 | 11 | 15 | 24.2 | 22.9 | 22.1 | 970 | 87.6 | 0.79 | 2.1 | 6.5 | 6.5 |
| OMS180L-6 | 15 | 20 | 31.7 | 30.1 | 29.0 | 970 | 88.8 | 0.81 | 2.0 | 7.0 | 7.0 |
| OMS200L1-6 | 18.5 | 25 | 38.8 | 36.8 | 35.5 | 970 | 89.5 | 0.81 | 2.1 | 7.0 | 7.0 |
| OMS200L2-6 | 22 | 30 | 44.7 | 42.5 | 40.9 | 970 | 90.1 | 0.83 | 2.1 | 7.0 | 7.0 |
| OMS225M-6 | 30 | 40 | 59.6 | 56.6 | 54.5 | 980 | 91.1 | 0.84 | 2.0 | 7.0 | 7.0 |
| OMS250M-6 | 37 | 50 | 71.3 | 67.7 | 65.3 | 980 | 91.7 | 0.86 | 2.1 | 7.0 | 7.0 |
| OMS280S-6 | 45 | 60 | 86.1 | 81.8 | 78.9 | 980 | 92.3 | 0.86 | 2.1 | 7.0 | 7.0 |
| OMS280M-6 | 55 | 75 | 105 | 99.5 | 95.9 | 980 | 92.8 | 0.86 | 2.1 | 7.0 | 7.0 |
| OMS315S-6 | 75 | 100 | 142 | 135 | 130 | 990 | 93.5 | 0.86 | 2.0 | 7.0 | 7.0 |
| OMS315M-6 | 90 | 125 | 169 | 161 | 155 | 990 | 93.9 | 0.86 | 2.0 | 7.0 | 7.0 |
| OMS315L1-6 | no | 150 | 206 | 196 | 189 | 990 | 94.3 | 0.86 | 2.0 | 6.7 | 6.7 |
| OMS315L2-6 | 132 | 180 | 243 | 231 | 223 | 990 | 94.7 | 0.87 | 2.0 | 6.7 | 6.7 |
| OMS355M1-6 | 160 | 220 | 291 | 277 | 267 | 990 | 94.9 | 0.88 | 1.9 | 6.7 | 6.7 |
| OMS355M2-6 | 200 | 270 | 364 | 346 | 333 | 990 | 94.9 | 0.88 | 1.9 | 6.7 | 6.7 |
| OMS355L1-6 | 220 | 300 | 400 | 380 | 367 | 990 | 94.9 | 0.88 | 1.9 | 6.7 | 6.7 |
| OMS355L-6 | 250 | 335 | 455 | 432 | 416 | 990 | 94.9 | 0.88 | 1.9 | 6.7 | 6.7 |
| OMS400M1-6 | 315 | 420 | 572 | 544 | 524 | 992 | 95.0 | 0.88 | 1.4 | 6.5 | 6.5 |
| OMS400M2-6 | 355 | 475 | 645 | 613 | 591 | 995 | 95.0 | 0.88 | 1.4 | 6.5 | 6.5 |
| OMS400L1-6 | 400 | 535 | 727 | 691 | 666 | 991 | 95.0 | 0.88 | 1.4 | 6.5 | 6.5 |
| OMS400L2-6 | 450 | 600 | 818 | 777 | 749 | 995 | 95.0 | 0.88 | 1.4 | 6.5 | 6.5 |
| OMS400L3-6 | 500 | 670 | 909 | 863 | 832 | 994 | 95.0 | 0.88 | 1.4 | 6.5 | 6.5 |

8P

Synchronous speed 750r/min

| Model T | Rated Output | | Rated Current (A) | | | Speed rpm | Eff(%) | Power factor COSφ | Tst/Tn | Ist/In | Tmax/Tu |
|------------|--------------|------|-------------------|---------|---------|--------------|--------|-------------------------|--------|--------|---------|
| | KW | HP | at 380V | at 400V | at 415V | | | | | | |
| OMS801-8 | 0.18 | 0.25 | 0.91 | 0.87 | 0.84 | 630 | 49.0 | 0.61 | 1.8 | 4.0 | 1.9 |
| OMS802-8 | 0.25 | 0.34 | 1.20 | 1.14 | 1.10 | 640 | 52.0 | 0.61 | 1.8 | 4.0 | 1.9 |
| OMS90S-8 | 0.37 | 0.50 | 1.54 | 1.46 | 1.41 | 660 | 60.0 | 0.61 | 1.8 | 4.0 | 1.9 |
| OMS90L-8 | 0.55 | 0.75 | 2.25 | 2.13 | 2.06 | 660 | 61.0 | 0.61 | 1.8 | 4.0 | 2.0 |
| OMS100L1-8 | 0.75 | 1 | 2.43 | 2.31 | 2.22 | 690 | 70.0 | 0.67 | 1.8 | 4.0 | 2.0 |
| OMS100L2-8 | 1.1 | 1.5 | 3.32 | 3.16 | 3.04 | 690 | 72.9 | 0.69 | 1.8 | 5.0 | 2.0 |
| OMSU2V-8 | 1.5 | 2 | 4.39 | 4.17 | 4.02 | 680 | 75.2 | 0.69 | 1.8 | 5.0 | 2.0 |
| OMS132S-8 | 2.2 | 3 | 6.06 | 5.76 | 5.55 | 710 | 77.7 | 0.71 | 1.8 | 6.0 | 2.0 |
| OMS132V-8 | 3 | 4 | 7.83 | 7.44 | 7.17 | 710 | 79.7 | 0.73 | 1.8 | 6.0 | 2.0 |
| OMS160V1-8 | 4 | 5.5 | 10.2 | 9.72 | 9.37 | 720 | 81.4 | 0.73 | 1.9 | 6.0 | 2.0 |
| OMS160V2-8 | 5.5 | 7.5 | 13.6 | 12.9 | 12.4 | 720 | 83.1 | 0.74 | 2.0 | 6.0 | 2.0 |
| OMS160L-8 | 7.5 | 10 | 17.9 | 17.0 | 16.4 | 720 | 84.7 | 0.75 | 2.0 | 6.0 | 2.0 |
| OMS180L-8 | 11 | 15 | 25.5 | 24.2 | 23.3 | 730 | 86.4 | 0.76 | 2.0 | 6.6 | 2.0 |
| OMS200L-8 | 15 | 20 | 34.2 | 32.5 | 31.3 | 730 | 87.7 | 0.76 | 2.0 | 6.6 | 2.0 |
| OMS225S-8 | 18.5 | 25 | 41.7 | 39.7 | 38.2 | 730 | 88.6 | 0.76 | 1.9 | 6.6 | 2.0 |
| OMS225M-8 | 22 | 30 | 48.0 | 45.6 | 44.0 | 740 | 89.2 | 0.78 | 1.9 | 6.6 | 2.0 |
| OMS250VH-8 | 30 | 40 | 64.0 | 60.8 | 58.6 | 740 | 90.2 | 0.79 | 1.9 | 6.6 | 2.0 |
| OMS280S-8 | 37 | 50 | 78.4 | 74.5 | 71.8 | 740 | 90.8 | 0.79 | 1.9 | 6.6 | 2.0 |
| OMS280V-8 | 45 | 60 | 94.7 | 90.0 | 86.7 | 740 | 91.4 | 0.79 | 1.9 | 6.6 | 2.0 |
| OMS315S-8 | 55 | 75 | 112 | 107 | 103 | 740 | 91.9 | 0.81 | 1.8 | 6.6 | 2.0 |
| OMS315V-8 | 75 | 100 | 152 | 144 | 139 | 740 | 92.6 | 0.81 | 1.8 | 6.6 | 2.0 |
| OMS315L1-8 | 90 | 125 | 180 | 171 | 164 | 740 | 92.9 | 0.82 | 1.8 | 6.6 | 2.0 |
| OMS315L2-8 | 110 | 150 | 218 | 208 | 200 | 740 | 93.3 | 0.82 | 1.8 | 6.4 | 2.0 |
| OMS35541-8 | 132 | 180 | 262 | 249 | 240 | 740 | 93.5 | 0.82 | 1.8 | 6.4 | 2.0 |
| OMS355V2-8 | 160 | 220 | 316 | 300 | 289 | 740 | 93.8 | 0.82 | 1.8 | 6.4 | 2.0 |
| OMS355L1-8 | 180 | 240 | 355 | 337 | 325 | 740 | 94.0 | 0.82 | 1.8 | 6.4 | 2.0 |
| OMS355L2-8 | 200 | 270 | 389 | 370 | 357 | 740 | 94.0 | 0.83 | 1.8 | 6.4 | 2.0 |
| OMS400V1-8 | 250 | 335 | 487 | 463 | 446 | 745 | 94.0 | 0.83 | 1.3 | 6.4 | 3.0 |
| OMS400V2-8 | 280 | 375 | 545 | 518 | 499 | 745 | 94.0 | 0.83 | 1.3 | 6.4 | 3.0 |
| OMS400L1-8 | 315 | 425 | 613 | 583 | 562 | 746 | 94.0 | 0.83 | 1.3 | 6.4 | 3.0 |
| OMS400L2-8 | 355 | 475 | 691 | 657 | 633 | 744 | 94.0 | 0.83 | 1.3 | 6.4 | 3.0 |
| OMS400L3-8 | 400 | 535 | 779 | 740 | 713 | 743 | 94.0 | 0.83 | 1.3 | 6.4 | 3.0 |




10P

Synchronous speed 600r/min


| Model T | Rated Output | | Rated Current (A) | | | Speed rpm | Eff(%) | Power factor COSφ | Tst/Tn | Ist/In | Tmax/Tu |
|--------------|--------------|-----|-------------------|---------|---------|--------------|--------|-------------------------|--------|--------|---------|
| | KW | HP | at 380V | at 400V | at 415V | | | | | | |
| OMS80L-10 | 7.5 | 10 | 20.6 | 19.5 | 18.8 | 530 | 77.0 | 0.72 | 1.9 | 6.6 | 2.0 |
| OMS2001-10 | 11 | 15 | 28.7 | 27.2 | 26.2 | 540 | 81.0 | 0.72 | 1.9 | 6.6 | 2.0 |
| OMS225S-10 | 15 | 20 | 37.7 | 35.8 | 34.5 | 570 | 84.0 | 0.72 | 1.9 | 6.6 | 2.0 |
| OMS225V-10 | 18.5 | 25 | 45.3 | 43.0 | 41.5 | 580 | 85.0 | 0.73 | 1.9 | 6.6 | 2.0 |
| OMS250V-10 | 22 | 30 | 53.2 | 50.6 | 48.8 | 580 | 86.0 | 0.73 | 1.9 | 6.6 | 2.0 |
| OMS280S-10 | 30 | 40 | 67.4 | 64.0 | 61.7 | 585 | 89.0 | 0.76 | 1.9 | 6.6 | 2.0 |
| OMS280V-10 | 37 | 50 | 81.1 | 77.1 | 74.3 | 585 | 90.0 | 0.77 | 1.9 | 6.6 | 2.0 |
| OMS315S-10 | 45 | 60 | 98 | 93 | 89 | 585 | 91.0 | 0.77 | 1.8 | 6.6 | 2.0 |
| OMS315V-10 | 55 | 75 | 116 | 111 | 107 | 590 | 92.0 | 0.78 | 1.8 | 6.6 | 2.0 |
| OMS315L1-10 | 75 | 100 | 157 | 149 | 144 | 590 | 92.0 | 0.79 | 1.8 | 6.6 | 2.0 |
| OMS315L2-10 | 90 | 125 | 186 | 177 | 170 | 590 | 93.0 | 0.79 | 1.8 | 6.4 | 2.0 |
| OMS3555*1-10 | 110 | 150 | 221 | 210 | 202 | 590 | 93.5 | 0.81 | 1.8 | 6.4 | 2.0 |
| OMS355V2-10 | 132 | 180 | 263 | 250 | 241 | 590 | 94.0 | 0.81 | 1.8 | 6.4 | 2.0 |
| OMS355L1-10 | 160 | 220 | 314 | 298 | 288 | 590 | 94.4 | 0.82 | 1.8 | 6.4 | 2.0 |
| OMS355L2-10 | 180 | 240 | 349 | 331 | 319 | 590 | 94.5 | 0.83 | 1.8 | 6.4 | 2.0 |
| OMS400V1-10 | 200 | 270 | 387 | 368 | 355 | 590 | 94.5 | 0.83 | 1.3 | 6.4 | 3.0 |
| OMS400M2-10 | 250 | 335 | 484 | 460 | 443 | 590 | 94.5 | 0.83 | 1.3 | 6.4 | 3.0 |
| OMS400L1-10 | 280 | 375 | 542 | 515 | 497 | 590 | 94.5 | 0.83 | 1.3 | 6.4 | 3.0 |
| OMS400L2-10 | 315 | 425 | 610 | 580 | 559 | 590 | 94.5 | 0.83 | 1.3 | 6.4 | 3.0 |
| OMS400L3-10 | 355 | 475 | 688 | 653 | 630 | 590 | 94.5 | 0.83 | 1.3 | 6.4 | 3.0 |

MOUNTING AND OVERALL DIMENSIONS

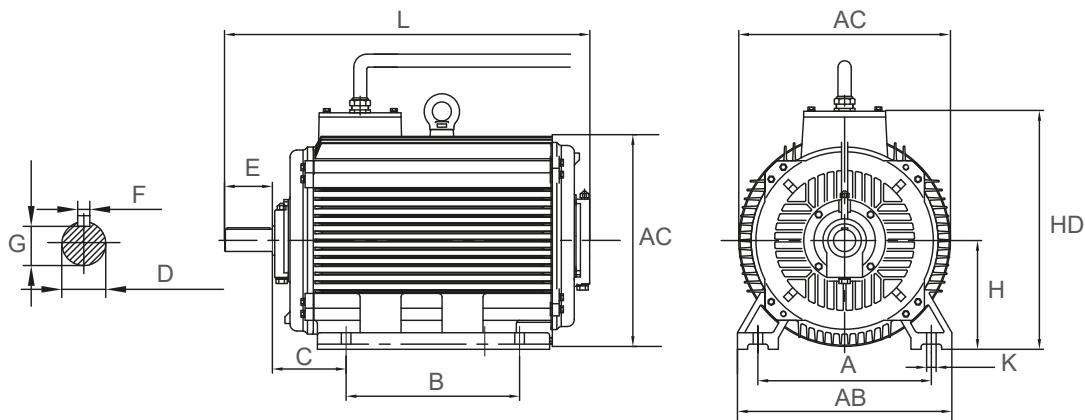

IM B3 H80-355

| TYPE | POLE | A | B | C | D | E | F | G | H | K | AB | AC | AD | HD | L |
|------|------|-----|-----|-----|-----|-----|----|------|-----|----|-----|-----|-----|------|------|
| 63 | 2-8 | 100 | 80 | 40 | 11 | 23 | 4 | 8.5 | 63 | 7 | 135 | 130 | 70 | 180 | 225 |
| 71 | 2-8 | 112 | 90 | 45 | 14 | 30 | 5 | 11 | 71 | 7 | 150 | 145 | 80 | 195 | 250 |
| 80 | 2-8 | 125 | 100 | 50 | 19 | 40 | 6 | 15.5 | 80 | 10 | 165 | 175 | 145 | 214 | 295 |
| 90S | 2-8 | 140 | 100 | 56 | 24 | 50 | 8 | 20 | 90 | 10 | 180 | 195 | 155 | 250 | 315 |
| 90L | 2-8 | 140 | 125 | 56 | 24 | 50 | 8 | 20 | 90 | 10 | 180 | 195 | 155 | 250 | 340 |
| 100L | 2-8 | 160 | 140 | 63 | 28 | 60 | 8 | 24 | 100 | 12 | 205 | 215 | 180 | 270 | 385 |
| 112M | 2-8 | 190 | 140 | 70 | 28 | 60 | 8 | 24 | 112 | 12 | 230 | 240 | 190 | 300 | 400 |
| 132S | 2-8 | 216 | 140 | 89 | 38 | 80 | 10 | 33 | 132 | 12 | 270 | 275 | 210 | 345 | 470 |
| 132M | 2-8 | 216 | 178 | 89 | 38 | 80 | 10 | 33 | 132 | 12 | 270 | 275 | 210 | 345 | 510 |
| 160M | 2-8 | 254 | 210 | 108 | 42 | 110 | 12 | 37 | 160 | 15 | 320 | 330 | 255 | 420 | 615 |
| 160L | 2-8 | 254 | 254 | 108 | 42 | 110 | 12 | 37 | 160 | 15 | 320 | 330 | 255 | 420 | 670 |
| 180M | 2-8 | 279 | 241 | 121 | 48 | 110 | 14 | 42.5 | 180 | 15 | 355 | 380 | 280 | 455 | 700 |
| 180L | 2-8 | 279 | 279 | 121 | 48 | 110 | 14 | 42.5 | 180 | 15 | 355 | 380 | 280 | 455 | 740 |
| 200L | 2-8 | 318 | 305 | 133 | 55 | 110 | 16 | 49 | 200 | 19 | 420 | 400 | 305 | 480 | 770 |
| 225S | 4-8 | 356 | 286 | 149 | 60 | 140 | 18 | 53 | 225 | 19 | 435 | 470 | 335 | 555 | 815 |
| 225M | 2 | 356 | 311 | 149 | 55 | 110 | 16 | 49 | 225 | 19 | 435 | 470 | 335 | 555 | 840 |
| | 4-8 | 356 | 311 | 149 | 60 | 140 | 18 | 53 | 225 | 19 | 435 | 470 | 335 | 555 | 845 |
| 250M | 2 | 406 | 349 | 168 | 60 | 140 | 18 | 53 | 250 | 24 | 490 | 510 | 370 | 615 | 910 |
| | 4-8 | 406 | 349 | 168 | 65 | 140 | 18 | 58 | 250 | 24 | 490 | 510 | 370 | 615 | 910 |
| 280S | 2 | 457 | 368 | 190 | 65 | 140 | 18 | 53 | 280 | 24 | 550 | 580 | 410 | 680 | 985 |
| | 4-8 | 457 | 368 | 190 | 75 | 140 | 20 | 67.5 | 280 | 24 | 550 | 580 | 410 | 680 | 985 |
| 280M | 2 | 457 | 419 | 190 | 65 | 140 | 18 | 53 | 280 | 24 | 550 | 580 | 410 | 680 | 1035 |
| | 4-8 | 457 | 419 | 190 | 75 | 140 | 20 | 67.5 | 280 | 24 | 550 | 580 | 410 | 680 | 1035 |
| 315S | 2 | 508 | 406 | 216 | 65 | 140 | 18 | 59 | 315 | 28 | 635 | 645 | 530 | 845 | 1160 |
| | 1-10 | 508 | 406 | 216 | 80 | 170 | 22 | 71 | 315 | 28 | 635 | 645 | 530 | 845 | 1270 |
| 315M | 2 | 508 | 457 | 216 | 65 | 140 | 18 | 53 | 315 | 28 | 635 | 645 | 530 | 845 | 1190 |
| | 4-10 | 508 | 457 | 216 | 80 | 170 | 22 | 71 | 315 | 28 | 635 | 645 | 530 | 845 | 1300 |
| 315L | 2 | 508 | 508 | 216 | 65 | 140 | 18 | 53 | 315 | 28 | 635 | 645 | 530 | 845 | 1190 |
| | 4-10 | 508 | 508 | 216 | 80 | 170 | 22 | 71 | 315 | 28 | 635 | 645 | 530 | 845 | 1300 |
| 355M | 2 | 610 | 560 | 254 | 75 | 140 | 20 | 67.5 | 355 | 28 | 730 | 710 | 655 | 1010 | 1500 |
| | 4-10 | 610 | 560 | 254 | 95 | 170 | 25 | 85 | 355 | 28 | 730 | 710 | 655 | 1010 | 1530 |
| | 4-10 | 610 | 560 | 254 | 100 | 210 | 28 | 90 | 355 | 28 | 730 | 710 | 655 | 1010 | 1570 |
| 355L | 2 | 610 | 630 | 254 | 75 | 140 | 20 | 67.5 | 355 | 28 | 730 | 710 | 655 | 1010 | 1500 |
| | 4-10 | 610 | 630 | 254 | 95 | 170 | 25 | 85 | 355 | 28 | 730 | 710 | 655 | 1010 | 1530 |
| | 4-10 | 610 | 630 | 254 | 100 | 210 | 28 | 90 | 355 | 28 | 730 | 710 | 655 | 1010 | 1570 |

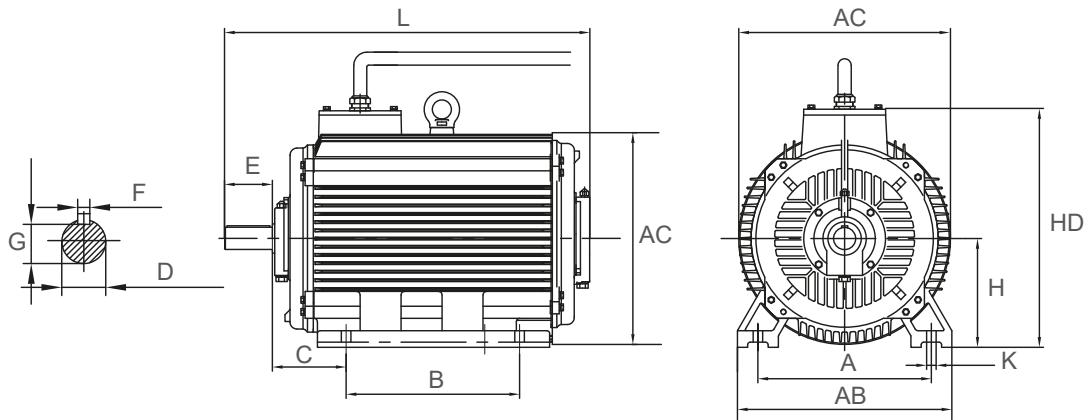

IM B3 H80-355


| TYPE | POLE | A | B | C | D | E | F | G | H | K | AB | AC | AD | HD | L |
|------|------|-----|-----|-----|-----|-----|----|------|-----|----|-----|-----|-----|------|------|
| 63 | 2-8 | 100 | 80 | 40 | 11 | 23 | 4 | 8.5 | 63 | 7 | 135 | 130 | 70 | 180 | 182 |
| 71 | 2-8 | 112 | 90 | 45 | 14 | 30 | 5 | 11 | 71 | 7 | 150 | 145 | 80 | 195 | 204 |
| 80 | 2-8 | 125 | 100 | 50 | 19 | 40 | 6 | 15.5 | 80 | 10 | 165 | 175 | 145 | 214 | 236 |
| 90S | 2-8 | 140 | 100 | 56 | 24 | 50 | 8 | 20 | 90 | 10 | 180 | 195 | 155 | 250 | 260 |
| 90L | 2-8 | 140 | 125 | 56 | 24 | 50 | 8 | 20 | 90 | 10 | 180 | 195 | 155 | 250 | 285 |
| 100L | 2-8 | 160 | 140 | 63 | 28 | 60 | 8 | 24 | 100 | 12 | 205 | 215 | 180 | 270 | 318 |
| 112M | 2-8 | 190 | 140 | 70 | 28 | 60 | 8 | 24 | 112 | 12 | 230 | 240 | 190 | 300 | 330 |
| 132S | 2-8 | 216 | 140 | 89 | 38 | 80 | 10 | 33 | 132 | 12 | 270 | 275 | 210 | 345 | 386 |
| 132M | 2-8 | 216 | 178 | 89 | 38 | 80 | 10 | 33 | 132 | 12 | 270 | 275 | 210 | 345 | 424 |
| 160M | 2-8 | 254 | 210 | 108 | 42 | 110 | 12 | 37 | 160 | 15 | 320 | 330 | 255 | 420 | 532 |
| 160L | 2-8 | 254 | 254 | 108 | 42 | 110 | 12 | 37 | 160 | 15 | 320 | 330 | 255 | 420 | 576 |
| 180M | 2-8 | 279 | 241 | 121 | 48 | 110 | 14 | 42.5 | 180 | 15 | 355 | 380 | 280 | 455 | 598 |
| 180L | 2-8 | 279 | 279 | 121 | 48 | 110 | 14 | 42.5 | 180 | 15 | 355 | 380 | 280 | 455 | 636 |
| 200L | 2-8 | 318 | 305 | 133 | 55 | 110 | 16 | 49 | 200 | 19 | 420 | 400 | 305 | 480 | 675 |
| 225S | 4-8 | 356 | 286 | 149 | 60 | 140 | 18 | 53 | 225 | 19 | 435 | 470 | 335 | 555 | 687 |
| 225M | 2 | 356 | 311 | 149 | 55 | 110 | 16 | 49 | 225 | 19 | 435 | 470 | 335 | 555 | 682 |
| | 4-8 | 356 | 311 | 149 | 60 | 140 | 18 | 53 | 225 | 19 | 435 | 470 | 335 | 555 | 712 |
| 250M | 2 | 406 | 349 | 168 | 60 | 140 | 18 | 53 | 250 | 24 | 490 | 510 | 370 | 615 | 778 |
| | 4-8 | 406 | 349 | 168 | 65 | 140 | 18 | 58 | 250 | 24 | 490 | 510 | 370 | 615 | 778 |
| 280S | 2 | 457 | 368 | 190 | 65 | 140 | 18 | 58 | 280 | 24 | 550 | 580 | 410 | 680 | 859 |
| | 4-8 | 457 | 368 | 190 | 75 | 140 | 20 | 67.5 | 280 | 24 | 550 | 580 | 410 | 680 | 859 |
| 280M | 2 | 457 | 419 | 190 | 65 | 140 | 18 | 58 | 280 | 24 | 550 | 580 | 410 | 680 | 910 |
| | 4-8 | 457 | 419 | 190 | 75 | 140 | 20 | 67.5 | 280 | 24 | 550 | 580 | 410 | 680 | 910 |
| 315S | 2 | 508 | 406 | 216 | 65 | 140 | 18 | 58 | 315 | 28 | 635 | 645 | 530 | 845 | 1024 |
| | 4-10 | 508 | 406 | 216 | 80 | 170 | 22 | 71 | 315 | 28 | 635 | 645 | 530 | 845 | 1054 |
| 315M | 2 | 508 | 457 | 216 | 65 | 140 | 18 | 58 | 315 | 28 | 635 | 645 | 530 | 845 | 1134 |
| | 4-10 | 508 | 457 | 216 | 80 | 170 | 22 | 71 | 315 | 28 | 635 | 645 | 530 | 845 | 1164 |
| 315L | 2 | 508 | 508 | 216 | 65 | 140 | 18 | 58 | 315 | 28 | 635 | 645 | 530 | 845 | 1134 |
| | 4-10 | 508 | 508 | 216 | 80 | 170 | 22 | 71 | 315 | 28 | 635 | 645 | 530 | 845 | 1164 |
| 355M | 2 | 610 | 560 | 254 | 75 | 140 | 20 | 67.5 | 355 | 28 | 730 | 710 | 655 | 1010 | 1324 |
| | 4-10 | 610 | 560 | 254 | 95 | 170 | 25 | 86 | 355 | 28 | 730 | 710 | 655 | 1010 | 1354 |
| | 4-10 | 610 | 560 | 254 | 100 | 210 | 28 | 90 | 355 | 28 | 730 | 710 | 655 | 1010 | 1394 |
| 355L | 2 | 610 | 630 | 254 | 75 | 140 | 20 | 67.5 | 355 | 28 | 730 | 710 | 655 | 1010 | 1324 |
| | 4-10 | 610 | 630 | 254 | 95 | 170 | 25 | 86 | 355 | 28 | 730 | 710 | 655 | 1010 | 1354 |
| | 4-10 | 610 | 630 | 254 | 100 | 210 | 28 | 90 | 355 | 28 | 730 | 710 | 655 | 1010 | 1394 |

BEARINGS ARRANGEMENT OF STANDARD MOTORS

| FRAME SIZE | POLE | DE | NDE |
|------------|------|----------------------|------------------------|
| 63 | 2-4 | 6201770 | 62*1770 |
| 71 | 2-6 | 6202ZZC3 | 6202270 |
| 84 | 2-8 | 620477 C3 | 6204 7 7 0 |
| 94 | 2-8 | 6205770 | 6205770 |
| 106 | 2-8 | 620677 C3 | 620677 0 |
| 112 | 2-8 | 624677 0 or 6366ZZC3 | 62(167703 or 630677 03 |
| 132 | 2-8 | 6208/70 or 6308770 | 62087703 or 630877 0 |
| 164 | 2-10 | 6309770 or 6309 C3 | 6309770 or 6309 0 |
| 184 | 2-10 | 63110 | 63110 |
| 204 | 2-10 | 63120 | 6312 0 |
| 225 | 2-10 | 6313 0 | 63130 |
| 236 | 2-10 | 6314 0 | 63140 |
| 286 | 2 | 63140 | 63140 |
| | 4-12 | 63170 | 6317 03 |
| 315 | 2 | 63170 | 63170 |
| | 4 | 6319 0 | 63190 |
| | 6-12 | NU 2319 0 | 63190 |
| 355 | 2 | 63140 | 63190 |
| | 4 | 6322 0 | 63220 |
| | 6-12 | MI 2322 0 | 6322 03 |
| 404 | 2 | 63190 | 6319 03 |
| | 4 | 6326 0 | 6326 0 |
| | 6-12 | MI 23260 | 63260 |

THREADED HOLE DIMENSIONS OF SHAFT EXTENSION

| SHAFT EXTENSION | DB DIMENSION | F (MM) | USED FOR STANDARD FRAME SIZE | EFFECTIVE DEPTH (MM) |
|-----------------|--------------|--------|------------------------------|----------------------|
| 9 | M3 | 3 | 56 | 9 |
| 11 | M 4 | 4 | 63 | 12 |
| 14 | M 5 | 5 | 71 | 12 |
| 19 | M 6 | 6 | 80 | 16 |
| 24 | M 8 | 8 | 90 | 19 |
| 28 | MIC | 8 | 100-112 | 22 |
| 38 | M12 | 10 | 132 | 28 |
| 42 | M16 | 12 | 160 | 36 |
| 48 | M16 | 14 | 180 | 36 |
| 55 | M20 | 16 | 200. 225-2 | 42 |
| 60 | M20 | 18 | 225-4. 6. 8, 250-2 | 42 |
| 65 | M20 | 18 | 2504 . 6. 8. 280-2 . 315-2 | 42 |
| 75 | M20 | 20 | 280-4. \$. 8. 355-2 | 42 |
| 80 | M20 | 22 | 315-4. 6. 8 | 42 |
| 95 or 100 | M20 | 25 | 1554. 6. B | 42 |
| 110 | M20 | 28 | 400-4. 6. 8 | 42 |

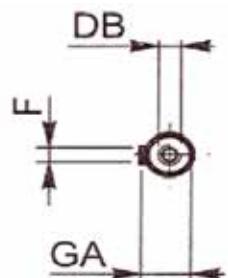

CATALOGUE

OMS Smoke Extraction Motor Series



OME Electric Motors srl

Sede - Via N. Tartaglia N.6b 25064 Gussago (Bs) Italy - Cod.Fisc. e Partita IVA: 03276210980 - Tel.+39 030 3737072 - Fax. +39 030 2411395 - info@omemotors.com

www.omemotors.com